
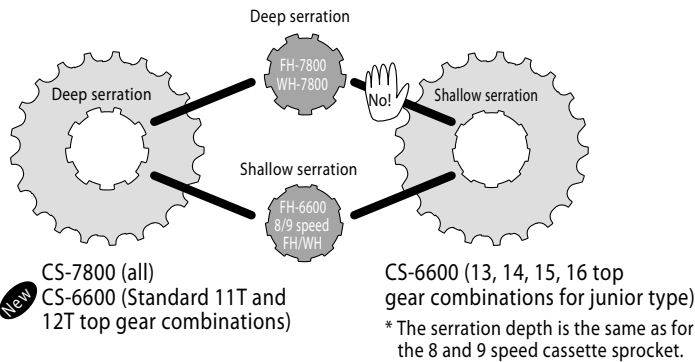
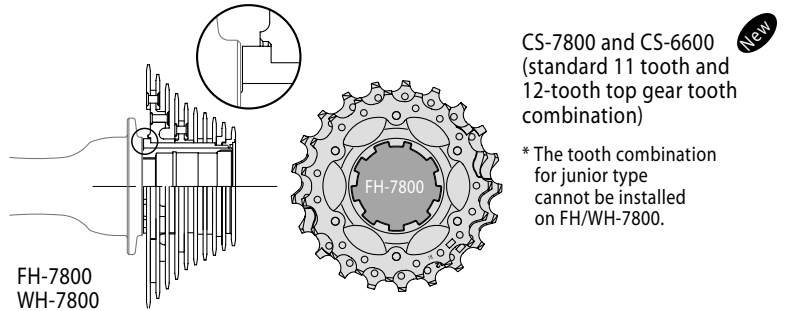


CS/FH/WH interchangeability (Road 10-speed)

The depth of the serration part is different between 8/9 speed freehub and FH-6600 and FH-7800 as following illustration. So, ensure not to use a wrong combination.

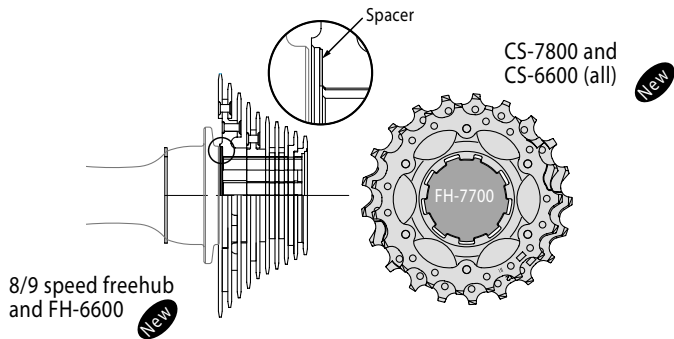

* Be aware that freehub (FH) and wheel (WH) compatibility with CS-6600 might differ depending on the tooth combination.

* The tooth combination for CS-6600 junior type cannot be installed on FH/WH-7800.

* A 1 mm spacer is required when combining CS-7800 and CS-6600 (except junior type) with a 8/9 speed freehub (FH) and FH-6600.

Cassette sprocket compatibility will differ depending on the freehub (FH) and wheel (WH) used.

Type	Model No.	Tooth	FH/WH-7800	FH-6600/8/9 speed freehub	WH-7700	WH-6500	WH-R535	WH-7701	WH-R540	WH-R500	WH-R550
10 speed standard	CS-7800	11 - 21	X	X	—	—	—	X	—	X	X
		12 - 21	X	X	—	—	—	X	X	X	X
	CS-6600	11 - 23	X	X	—	—	—	X	X	X	X
		12 - 23	X	X	—	—	—	X	X	X	X
		12 - 25	X	X	X	X	—	X	X	X	X
		12 - 27	X	X	X	X	—	X	X	X	X
10 speed junior	CS-6600	13 - 25	—	X	X	X	—	X	X	X	X
		14 - 25	—	X	X	X	—	X	X	X	X
		15 - 25	—	X	X	X	—	X	X	X	X
		16 - 27	—	X	X	X	—	X	X	X	X

X = Yes — = No

* NOTE: 9-speed cassettes may not be used with WH-7800 and FH-7800 due to the shallow serrations like the CS-6600 junior gearing (13,14,15,16T top gears).